


The PSB series: The classic filter mats Filter classes G 2 - G 4

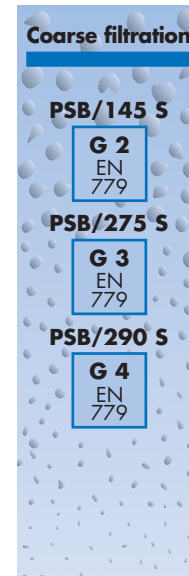

viledon[®]

The application

The PSB series comprises the following types:

- ▶ PSB/145 S
- ▶ PSB/275 S
- ▶ PSB/290 S

PSB filter mats are used for intake air filtration in all kinds of ventilation systems, particularly for coarse dust arrestance and as pre-filter stages.

The media and their characteristic features

▶ The mats are made of high performance nonwovens produced inhouse from elastic, break-resistant polyester fibers with thermal bonding.

▶ PSB/275 S and PSB/290 S are progressive in structure, with layers being arranged behind each other so as to ensure that the density of the fiber layers increases towards the clean air side. This optimizes the defined filter performance and the dust holding capacity, resulting in longer useful lifetime for the filter concerned.

▶ **Fire behaviour:** Viledon filter media satisfy the stringent requirements of Fire Class F1 according to DIN 53438 and are thus self-extinguishing.

▶ **Certified quality:** PSB filter mats have been tested according to EN 779 and are manufactured under our certified quality management system to ISO 9001. This offers all users the reassuring certainty that all filters will be supplied in consistently high standardized quality, documented by marking the filter mat with brand name, type designation and filter class.

		PSB/145 S	PSB/275 S	PSB/290 S
▶ Weight, approx.	g/m ²	120	180	300
▶ Thickness, approx.	mm	10	15	20
▶ Thermal stability	°C	up to 100	up to 100	up to 100
▶ Moisture resistance, rel. humidity	%	up to 100	up to 100	up to 100
▶ Supplied as rolls, useful width/length	mm/m	2000/40	2000/30	2000/20
▶ Supplied as cut pieces	mm	Pieces cut to customer's specification		

The special features of the PSB series



▶ Due to their high dust holding capacity and their resultant long useful lifetimes, PSB filter mats are particularly cost-efficient.

▶ All types of this series are especially effective in applications requiring stable arrestance in spite of high dust loading and high air flow rates.

▶ When used in exhaust air filtration, the advantage of the PSB series is that arrestance and dust holding capacity are very well harmonized.

Freudenberg

Technical filter test data in accordance with EN 779

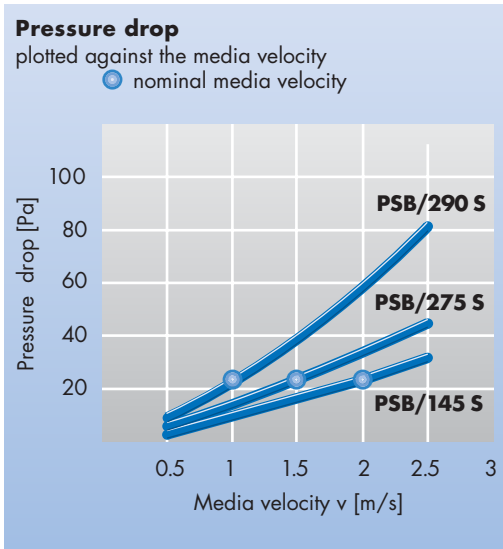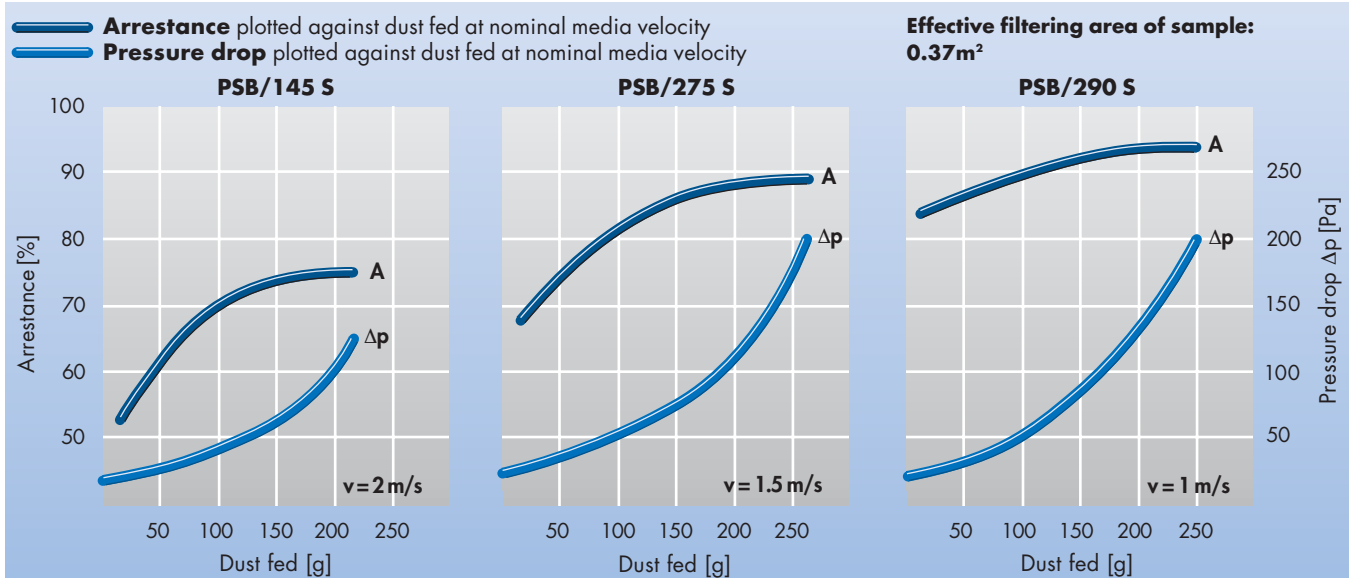

		PSB/145 S	PSB/275 S	PSB/290 S	
▶ Average arrestance	A_a	%	70	83	91
▶ Initial efficiency	E_i	%	< 20	< 20	< 20
▶ Nominal media velocity		m/s	2	1.5	1
▶ Initial pressure drop	P_a	Pa	22	22	22
▶ Final pressure drop*	P_a	Pa	250	250	250
▶ Dust holding capacity		g/m ²	650	700	750

* For cost-efficiency or system-specific reasons it may be appropriate to change the filters before reaching the stated final pressure drop.

The figures given are mean values subject to tolerances due to the normal production fluctuations. Our explicit written confirmation is always required for the correctness and applicability of the information involved in any particular case.

You will find instructions on how to handle and dispose of loaded filters in our information on product safety and eco-compatibility.

Subject to technical alterations.

Freudenberg Filtration Technologies KG

69465 Weinheim/Germany

Tel. +49 (0) 6201/80-6264 | Fax +49 (0) 6201/88-6299

viledon@freudenberg-filter.com | www.viledon-filter.com

